1D Wired CCD

Bar-code Scanner

Manual

V2.00

Specification

Voltage：DC 3.3V-5V	
Working current：110mA	Standby current:30mA
Source：632nm Red light	Print contrast::≥25%
CPU：ARM32-bit	
Speed：300 scans/second	Depth：3-50CM
Operating temperature：-20℃to 50℃	Resolution：≥4mil /0.1mm@PCS90%
Relative humidity：5% to 95%	
Reading angle：Roll±30 ， Skew? 60 ， Pitch 60	
Scanning method：Trigger、Always light、Command control	
Decoding capability: EAN-8, EAN-13, Codabar, CODE11 CODE 39, CODE 93, CODE128, China Post, GS1-128, GS1 Limited, GS1 Omnidirectional, UPC- A, UPC-E, ISBN/ISSN, ISBT , Interleaved 2 of 5, Matrix 2 of 5, Industrial 2 of 5 , MSI, Plessey, ITF14.	
Drop specification: 1.8m	Interface：USB.RS232.PS2
Certificate：CE，FCC，ROHS,IP54	

Bar code scanner Setting

1.System Setting

Restore the factory settings

2.Interface Setting

USB (default)

PS2

ivkrause
www.iv-krause.de

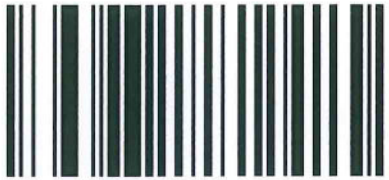

RS232

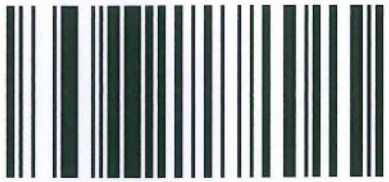

USB Virtual serial port

3.Baud rate Setting

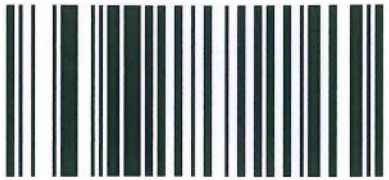

600bps

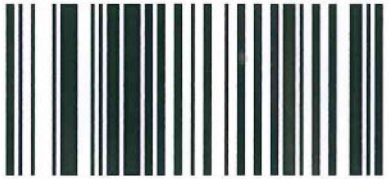

1200bps

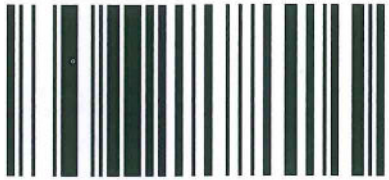

2400bps

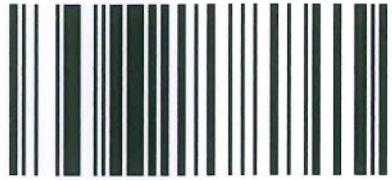

4800bps

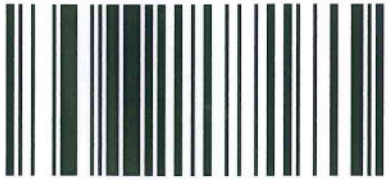

9 600bps(default）

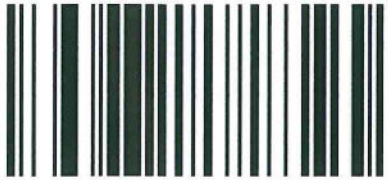

19200bps

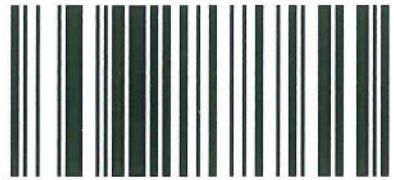

38400bps

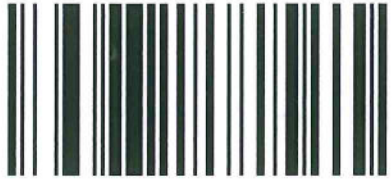

57600bps

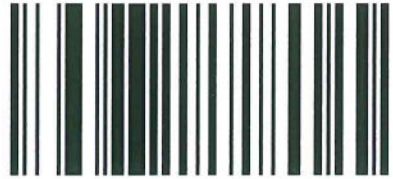

115200bps

4.Scanning mode

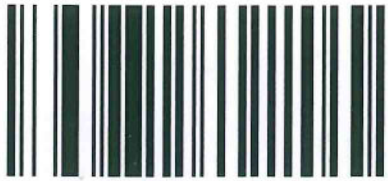

Button trigger（default）

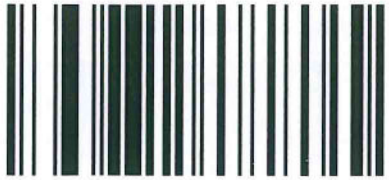

Automatic continuous scanning

5.Add prefix and suffix

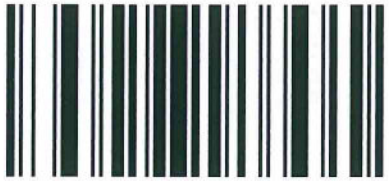

Add prefix

1D Wired CCD Bar-code Scanner

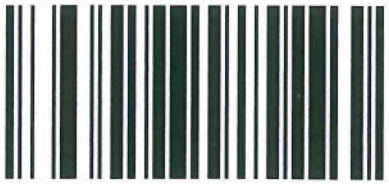

Clean all prefixes

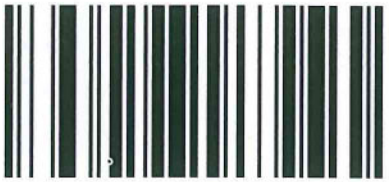

Add suffix

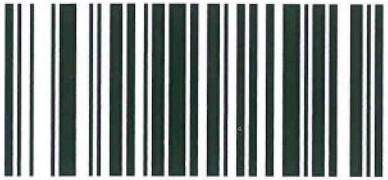

Clean all suffixes

6.Indication voice of successful

1D Wired CCD Bar-code Scanner

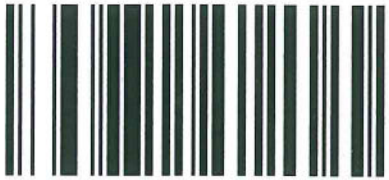

Open the voice(default)

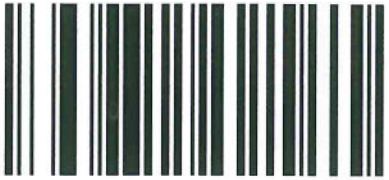

Close the voice

7.Auto trigger

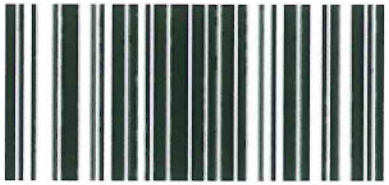

Enable Auto trigger

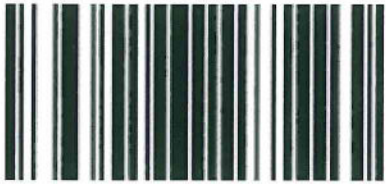

Disable Auto trigger

8.The Language ettings

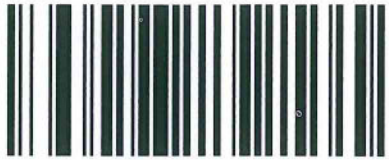

English(default)

Spanish

Portuguese

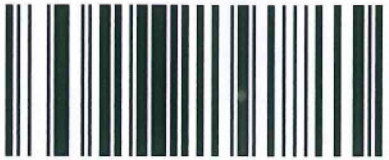

Italian

1D Wired CCD Bar-code Scanner

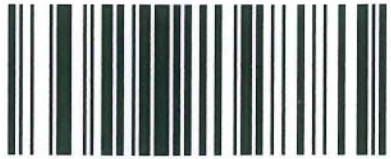

French

German

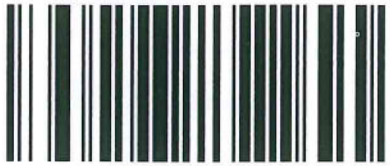

Japanese

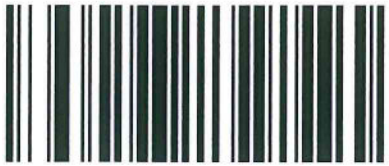

Russian